
Ecowood Collection



ABM solid *FLOOR*®

the future of luxury flooring



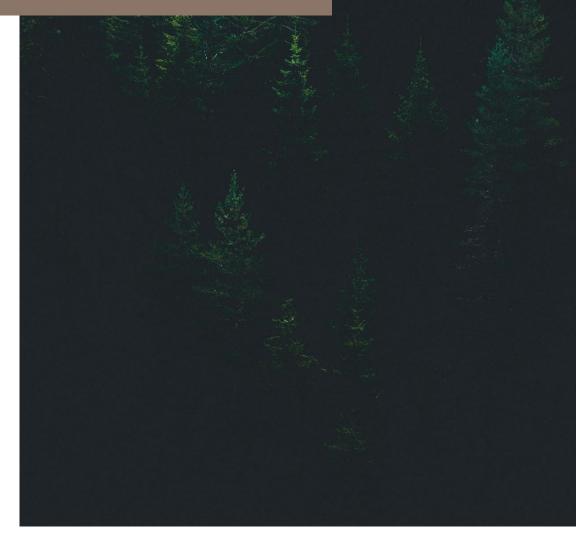



INNOVATION DESIGN TECHNOLOGY

At ABM, we seamlessly blend cutting-edge technology with the latest design trends to redefine modern flooring solutions. Our commitment to innovation is evident in our focus on emerging styles and dedication to sustainable practices. By utilizing advanced manufacturing techniques, we craft flooring that is not only stylish and trend-forward but also durable and environmentally responsible. This harmonious integration of technology and design ensures that each product exceeds the expectations of both aesthetics and functionality, perfectly suited for contemporary spaces. We are shaping the future of flooring with every creation, transforming spaces into something truly exceptional.





ABOUT THE PRODUCTION	P06
TECHNOLOGY	P10
COLLECTIONS	P19
ECOWOOD WHITE 475	P20
ECOWOOD LIGHT 469	P21
ECOWOOD GRIGIO 460	P22
ECOWOOD NOGAL 459	P23
ECOWOOD HONEY 472	P24
ECOWOOD MOCHA 441	P25
ECOWOOD WENGE 425	P26
ECOMARBLE	P28
ECOSTONE	P30
COMPREHENSIVE FLOORING SYSTEM	P32
COMPREHENSIVE FLOORING SYSTEM FAQs	P32 P33
FAQs	P33



ABOUT THE PRODUCTION




What's the raw materials of ABM solid *FLOOR*®?

There are 3 main materials for the ABM solid **FLOOR**[®] rigid core.

Stone, the main ingredient of limestones is CaCO3, heavy calcium powder, mesh size is 325mesh, around 44 microns.

The plastic, polyvinyl chloride (PVC) is a good insulation material to compound with CaCO3.

Combination of raw material formulated composition, there are around 3-7 kinds different processing aids mixed for the PVC & Limestone thermal synthesis.

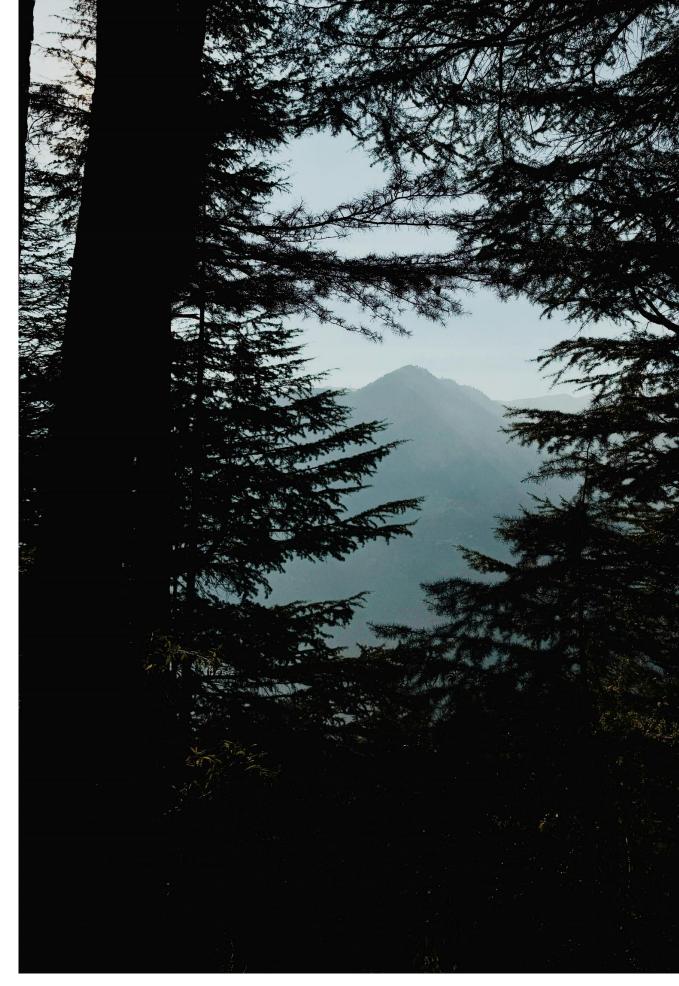

ABM solid **FLOOR**[®] is rigid, durable, can withstand a lot of traffic even from the pets.

It consists of five distinct layers, each contributing to its exceptional performance:

The 1st layer is UV coating layer

The diamond coating has the high scratch resistant and wear resistant performance.

The 2nd layer is Wear Layer

Available in thicknesses of 0.5mm and 0.7mm, it protects against daily wear and prevents warping issues.

ABM solid **FLOOR**[®] features an upgraded formula to maintain stability and durability.

The 3rd layer is Decorative Film

A printed image layer that is thermally laminated to the wear layer and core structure.

The 95% Decorative film production is using the oil-based ink, ABM solid **FLOOR**[®] is one of the few companies to promote the use of water-based ink supply chain management.

Water-based ink with water (45%~50%) as the solvent, VOC content is very low, small pollution to the environment. However, oil-based ink organic solvent (toluene, xylene, industrial alcohol, etc.) as a solvent. Oily ink solvent volatilization caused by air pollution, mainly liquid ink in the use of more organic solvents. Some organic solvents and some gases in the air chemical reaction, produce smelly chlorine and smoke. Serious air pollution, the growth of a variety of plants greater impact, destroy the ecological balance.

The 4th layer is Rigid Core


The standard formulation is PVC, CaCO3, Recycling materials with 5 or 6 additives: Calcium zinc stabilizer, PE WAX, Lubricant, ACR, CPE.,etc.

The 5th layer is the backing underlayment layer

The IXPE is the most consuming materials for underlayment, the 10 times foam rate IXPE with 1mm ~ 2mm will help the flooring to provide better comfort and mute performance.

How is vinyl plank flooring constructed?




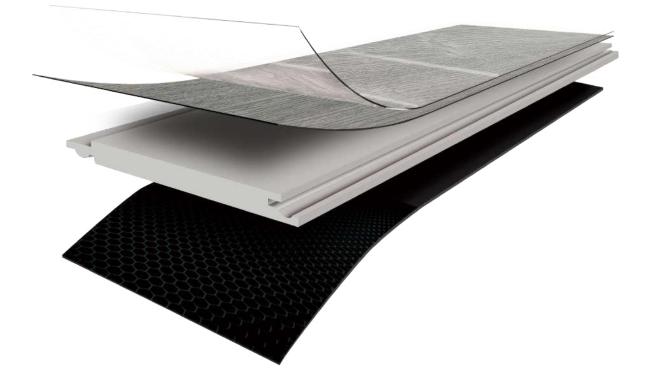

Where Elegance Meets Endurance

At ABM solid **FLOOR**®, we redefine spaces with flooring solutions that combine timeless beauty with cutting-edge innovation. Our floors are more than just surfaces – they're the foundation of your

DURABILITY.

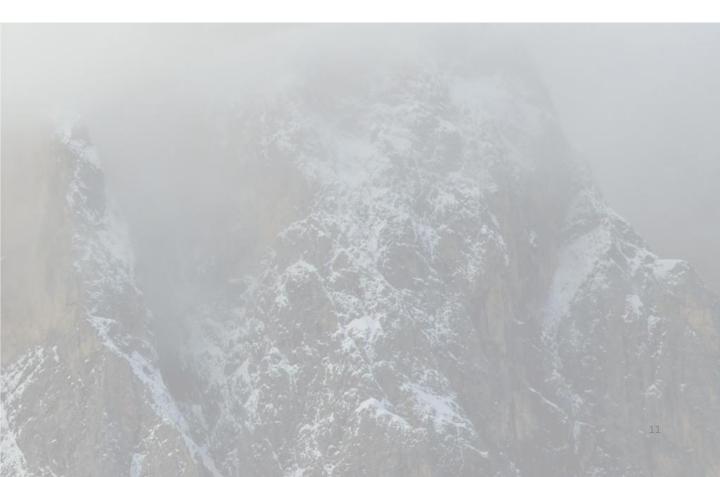



ABM solid **FLOOR**[®] is designed with an anti-scratch surface, making it a durable and practical choice for busy households and commercial spaces. The protective top layer resists scuffs, scratches, and daily wear, ensuring your floors maintain their flawless appearance over time. Ideal for high-traffic areas, this flooring combines style and resilience, providing peace of mind while preserving its beauty.

Durable and resilient

Real W¶od Effect

Rich, flowing veins with a dynamic interplay of light and dark tones

ABM solid **FLOOR**[®] offers a stunning real wood effect, capturing the natural beauty and intricate grain patterns of authentic hardwood. With advanced printing and embossing techniques, it replicates the warmth, texture, and charm of real wood while delivering the unmatched durability and ease of maintenance that **our** technology provides. Perfect for achieving a timeless, sophisticated look, the real wood effect of ABM solid **FLOOR**[®] brings elegance to any space without the concerns of scratches, moisture, or wear commonly associated with natural wood. It's the perfect balance of style and practicality.

ABM solid*FLOOR*[®] is 100% recyclable, making it an eco-friendly choice for modern living. Designed with sustainability in mind, it reduces environmental impact without compromising on quality or performance. Every component of this flooring can be repurposed, ensuring that it contributes to a circular economy rather than ending up in landfills. By choosing ABM solid*FLOOR*[®], you're not just investing in durability and style—you're also making a conscious decision to protect the planet for future generations. Sustainable, smart, and stylish, ABM solid*FLOOR*[®] flooring is the perfect blend of innovation and responsibility.





ABM solid **FLOOR**[®] is an excellent choice for underfloor heating, offering superior heat conductivity and even distribution. Its durable construction allows it to withstand temperature changes without warping or damage, ensuring long-lasting performance. The thin yet sturdy profile of ABM solid **FLOOR**[®] enhances the efficiency of underfloor heating systems, providing consistent warmth and comfort throughout your space. Easy to install and energy-efficient, this flooring is the perfect partner for modern heating solutions, creating a cozy and inviting environment in any room.



EASY TO DIY

ABM solid **FLOOR**[®] features an easy click-lock installation system, designed for hassle-free setup without the need for adhesives or specialized tools.

The interlocking planks effortlessly snap into place, making it a quick and efficient choice for both DIY enthusiasts and professional installers. This innovative system ensures a secure fit and seamless finish, saving time and effort while delivering stunning results.





EASY TO WATERPROOF

Because accidents do exist. Sophisticated UNILIN locking system and improved UV coating provide double protection for floors from penetration and contamination by spills.

The core of ABM solid*FLOOR®* is made from a dense blend of limestone powder, polyvinyl chloride, and stabilizers, which creates a completely impervious layer to water infiltration..



IMPACT RESISTANCE

The rigid core of ABM solid**FLOOR®** is made from a combination of natural limestone powder, PVC, and stabilizers. This makes the core dense and resilient, capable of withstanding heavy impacts without cracking or denting.

You do not have to worry when you walk on it in your new high heels or dropping your heavy suitcase on the floor after your trip.



Rigid core superior impact & dent resistance

FORMATS

Our ABM solid **FLOOR**[®] is crafted with precision and quality to meet versatile flooring needs. It features a robust core *thickness* of **5 to 7mm** for enhanced durability and stability. The *wear layer*, available in **0.3mm** or **0.5mm** options, ensures resistance to scratches and wear, perfect for high-traffic areas. Each plank measures **180x1220mm** and includes IXPE black padding in 1.00mm or 1.50mm for added comfort and sound insulation. Made from **100% virgin materials**, the flooring incorporates the reliable **Unilin Uniclic locking system** for seamless installation. With a **15-year** residential and **10-year** commercial *warranty*, ABM solid *FLOOR*[®] delivers lasting performance and elegance.

WHITE GRIGIO LIGHT NOGAL MOCHA HONEY WENGE	MARBLE STONE






ECOWOOD **GRIGIO** 460





ECOWOOD HONEY 472

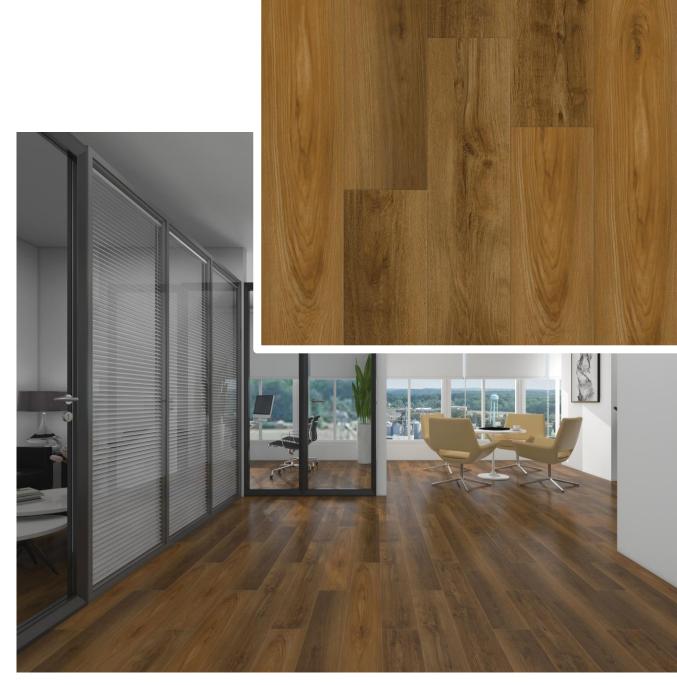









ECOMARBLE





ECOSTONE



FLOORING SYSTEM

Accessory Type	Thickness	Height	Length
Beeding	8 mm	20 mm	2438.4 mm
End Profile	8 mm	20 mm	2438.4 mm
L Profile	25 mm	25 mm	2438.4 mm
L Profile	30 mm	30 mm	2438.4 mm
L Profile	50 mm	50 mm	2438.4 mm
Reducer	8 mm	45 mm	2438.4 mm
Skritings	12 mm	100 mm	2438.4 mm
Skritings	12 mm	58 mm	2438.4 mm
Skritings	12 mm	75 mm	2438.4 mm
Skritings	8 mm	100 mm	2438.4 mm
Skritings	8 mm	58 mm	2438.4 mm
Skritings	8 mm	75 mm	2438.4 mm
T Profile	8 mm	45 mm	2438.4 mm

	Skirting	
	T- Profile	
	Reducer Profile	
	Beeding	
~	Flat Beeding	
	Skirting with Step (Tile Skirting)	
	End Profile	
	Stair noseing	
-	L-noseing Profile	



What is ABM solid FLOOR®?

It is designed to replicate the look and feel of traditional flooring materials such as stone, ceramic or wood, but provides many more practical benefits as you will see later in the article.

What is the ABM solid FLOOR® Structure

There are four main layers in this flooring structure: Scratch Resistant Layer (Wear Layer) Decorative Layer (Board Shades and Colors) Core Layer (Board)

Is ABM solid FLOOR® truly waterproof?

These vinyl planks are dense, dimensionally stable, quiet and strong. Designed to be 100 percent waterproof, not even localized moisture or humidity can cause swelling or damage to the planks of rigid core vinyl flooring.

Is ABM / solid FLOOR® better than tile?

For projects where aesthetic variety and a timeless look are priorities, tile remains a preferred choice, especially in areas such as kitchens, bathrooms, and outdoor spaces. On the other hand, ABM solid **FLOOR**[®] is ideal for hightraffic areas, moisture-prone environments, and spaces where quick and easy installation is required.

Is ABM solid FLOOR® better than laminate?

ABM solid **FLOOR**[®] offers remarkable durability, able to withstand heavy foot traffic and resist impacts, making it ideal for busy households and commercial spaces. Laminate flooring, while also durable, tends to show wear and tear like scratches and fade faster.

No the second

(62)

FLOOR COMPARISON

solid*FLOOR*®

		a brand of ABM	LVT	WPC	LAMINATED WOOD
	Wear resistance	Excellent	Fair	Good	Poor
	Waterproof	Excellent	Fair	Good	Poor
$\boxed{}$	No expansion or contraction	Excellent	Fair	Good	Poor
59.40°	High/low temperature stability	Excellent	Fair	Good	Fair
	Installation on any surface	Excellent	Fair	Good	Fair
	Scratch resistant	Excellent	Good	Good	Poor
X	Soundproofing capacity	Excellent	Poor	Excellent	Excellent
•••	Pet friendly	Excellent	Good	Good	Poor
CLICK	Easy assembly	Good	Good	Good	Poor
*	Suitable for sunny rooms	Excellent	Good	Excellent	Good
KH20	Free of formaldehyde	Excellent	Good	Excellent	Excellent
	Impact resistant	Excellent	Fair	Good	Poor

TECHNICAL SPECIFICATION

Specification	Property	Test Method	Result
	Dimensions	EN 427	1220*180mm
	Thickness Over All	EN 428	5.0 mm - 7.0 mm
Core thickness: 5 to 7 mm	Thickness Wear Layer	EN 429	0.3 mm, 0.5 mm
Wear layer : 0.3/0.5 mm	Pell Strength of Layers	EN 431	Pass
Plank size : 180x1220 mm	Shear Forces of Layers	EN 432	Good
Padding : IXPE Black 1.00 / 1.50 mm	Residual Indentations	EN 433	Mean Value ≤ 0.1mm
Material : 100% Virgin	Dimension Stability	EN 434	Shrinkage ≤ 0.12%/Curling ≤ 1.2mm
Click lock : Unilin Uniclic	Resistance to Chemicals	EN 423	Class 0
Warranty : 15 years residential	Castot Chair Continuous	EN 425	No Disturbance/No Delamination
and 10 years commercial	Light Fastness	ISO 105 B02	≥ 6
	ASTM E84-03	NFPA Class B1	
	Slip Resistance	DIN 51130	R9

PACKING DETAILS

Thickness	M2/Box	Pz/Box	KG/Box	Box/ Plt
5mm	2.20	10	21.96	60
6mm	1.76	8	21.08	60
7mm	1.54	7	21.52	60









IMPACT RESISTANT



UNDERFLOOR HEATING



CLICK FLOORING



Exhibitor Display for Merchandising

Showcase the beauty and quality of **ABM** solid *FLOOR*® with our premium exhibitor displays. Designed for retailers and showrooms, our merchandising solutions highlight the rich textures, natural finishes, and durability of our flooring. Customers can feel the superior craftsmanship firsthand.





Organization & High Tech RND

info@solidfloor.uk https://solidfloor.uk/